



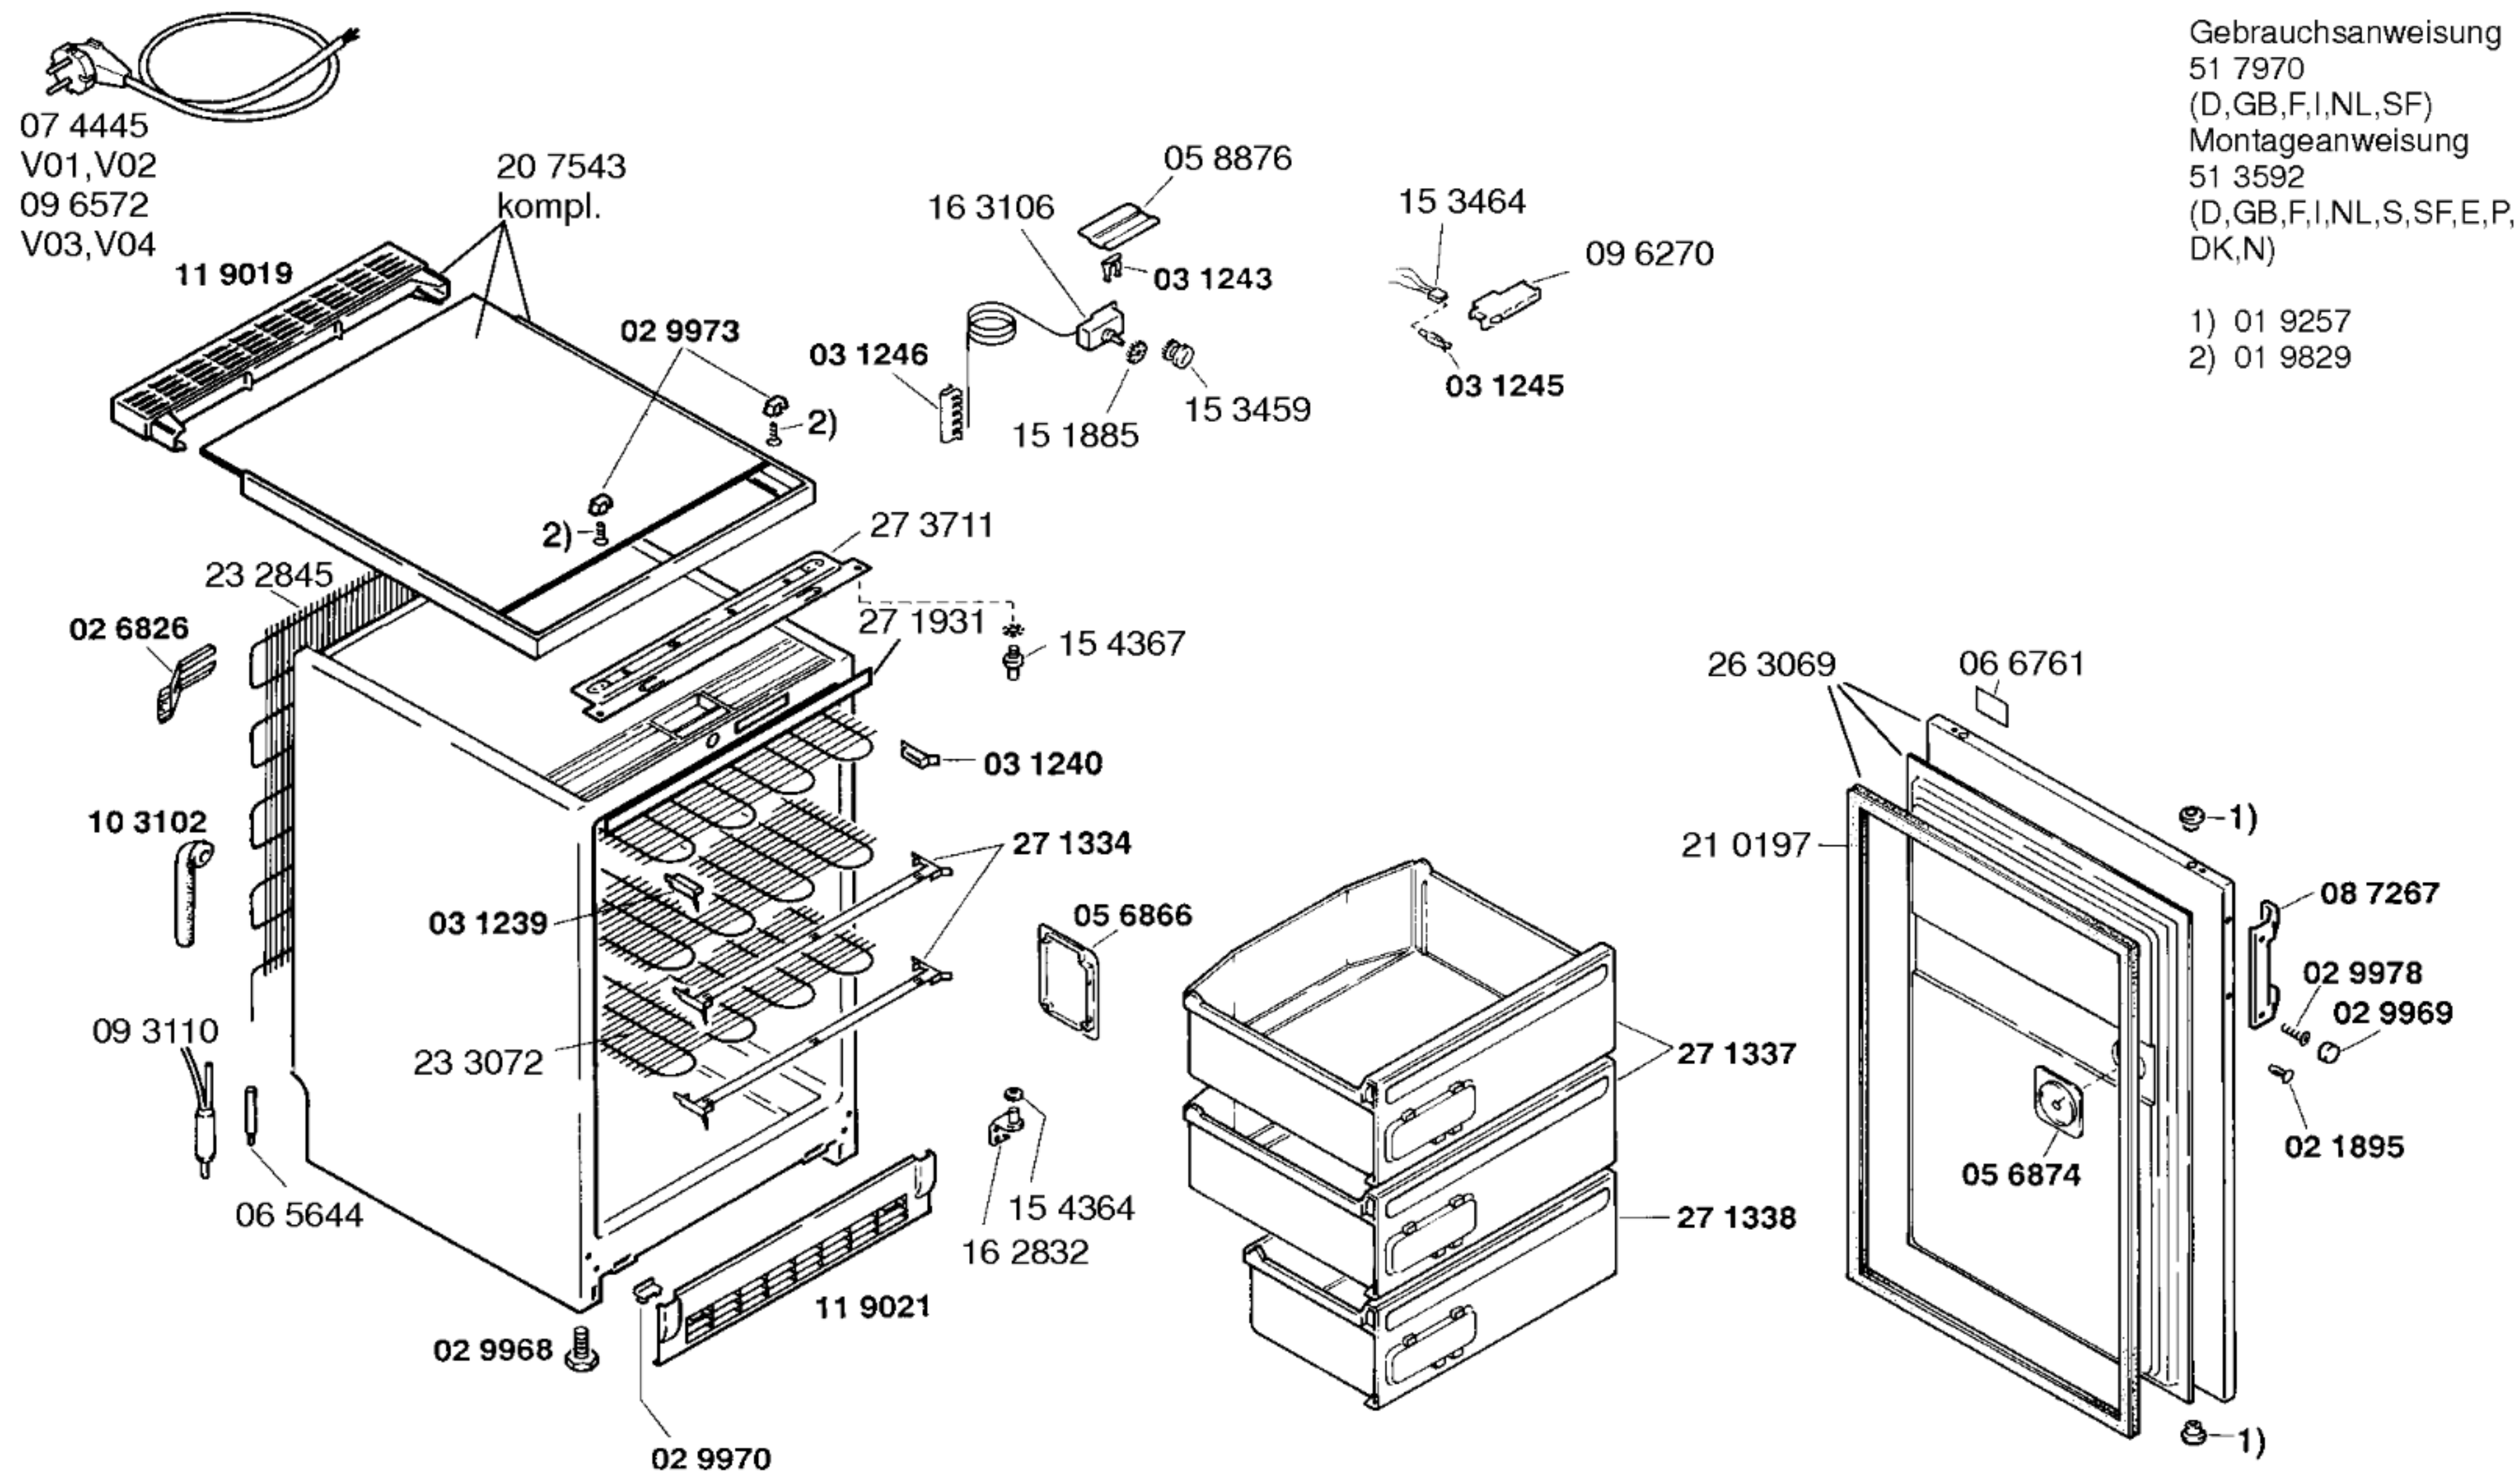

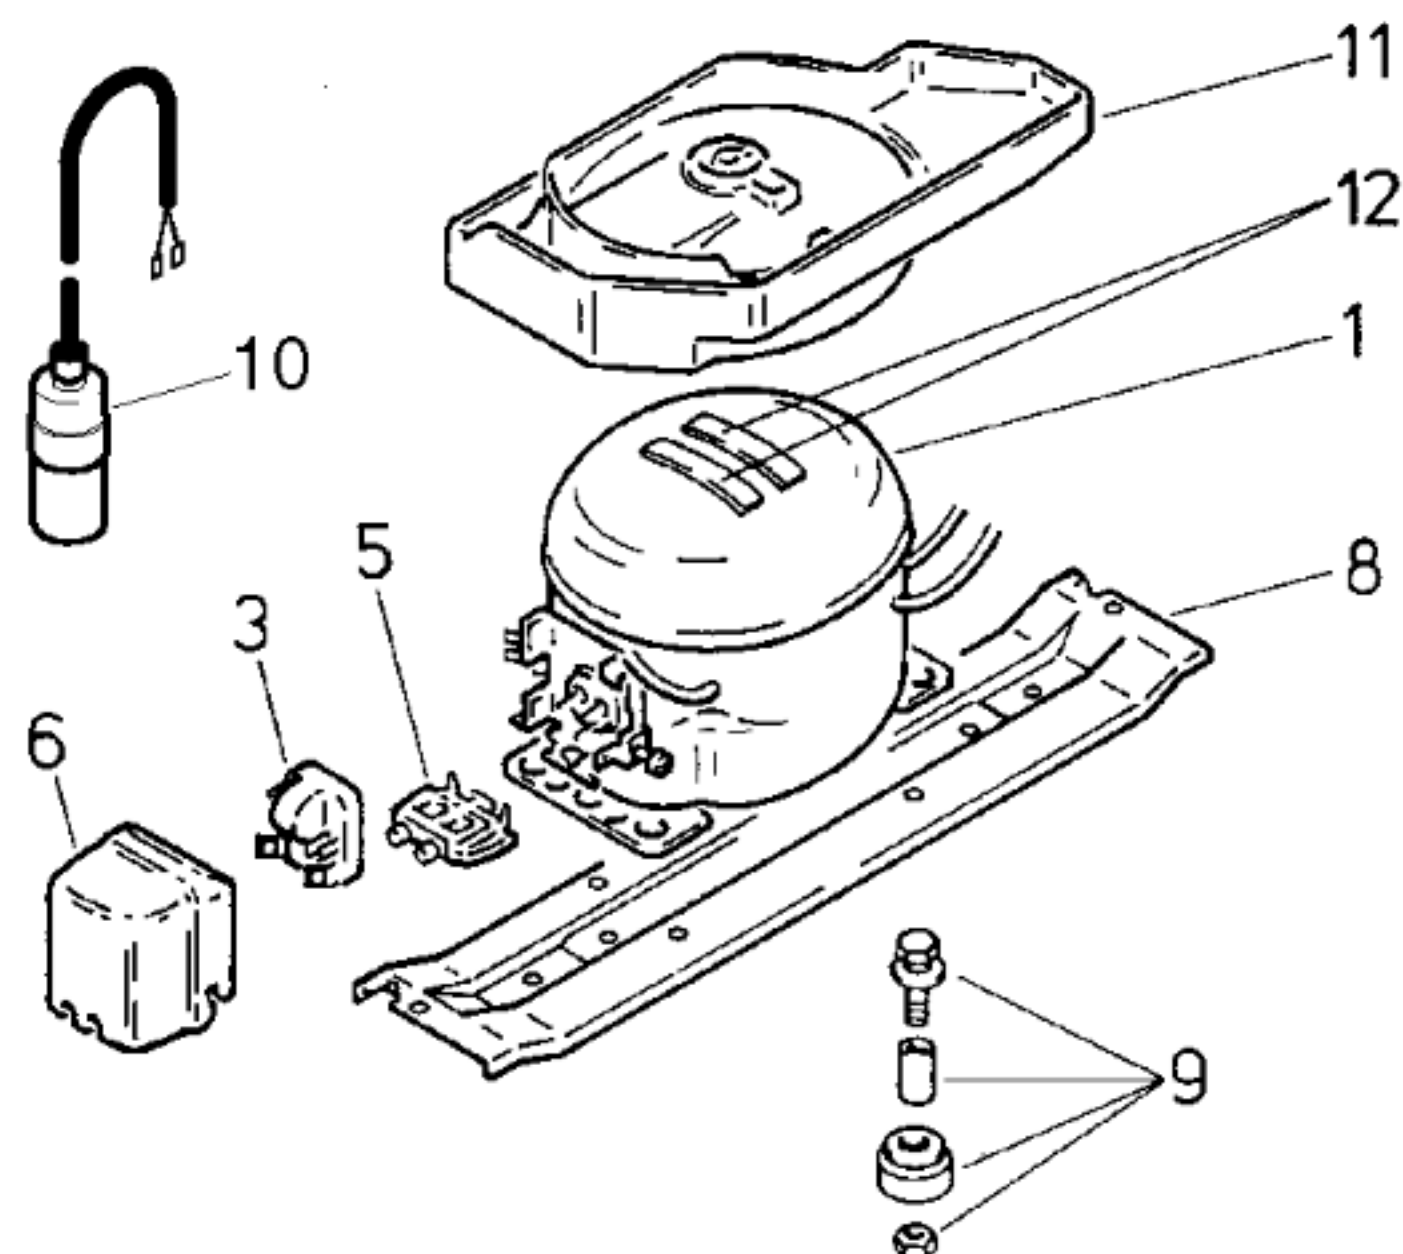

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur	Matsushita	Danfoss	
Typ/Type	SD 65 E	TLS 7 K	
Förderleistung/Delivery/Débit	l/h	1168	
Anlaufstrom/Starting current/Cour de démarrage	A	5,0	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	16,0	
	Hi/aux Ω	17,0	
Temp.-Regler/Thermostat	Danfoss		
Typ/Type	BE 002		
Reglerstellung/Position	kalt warm		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	-25 -17	
Valeurs de commutation	„aus“	-33 -23	
(„abtauen“ od.)	„alarm“	-19,5 -13	
Füllmenge/Fill.quantity/Charge	R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée	W	78	76
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

* siehe Typenschild

	V01,V04	V02,V03	
Pos.	Matsushita	Danfoss	
	SD 65 E	TLS 7 K	
1	14 1316	14 1239	
2			
3	15 3306	15 1055	
4			
5	15 3865	15 0760	
6	15 3303	15 1072	
7			
8	27 0833	27 0833	
9			
10			
11			
12			