




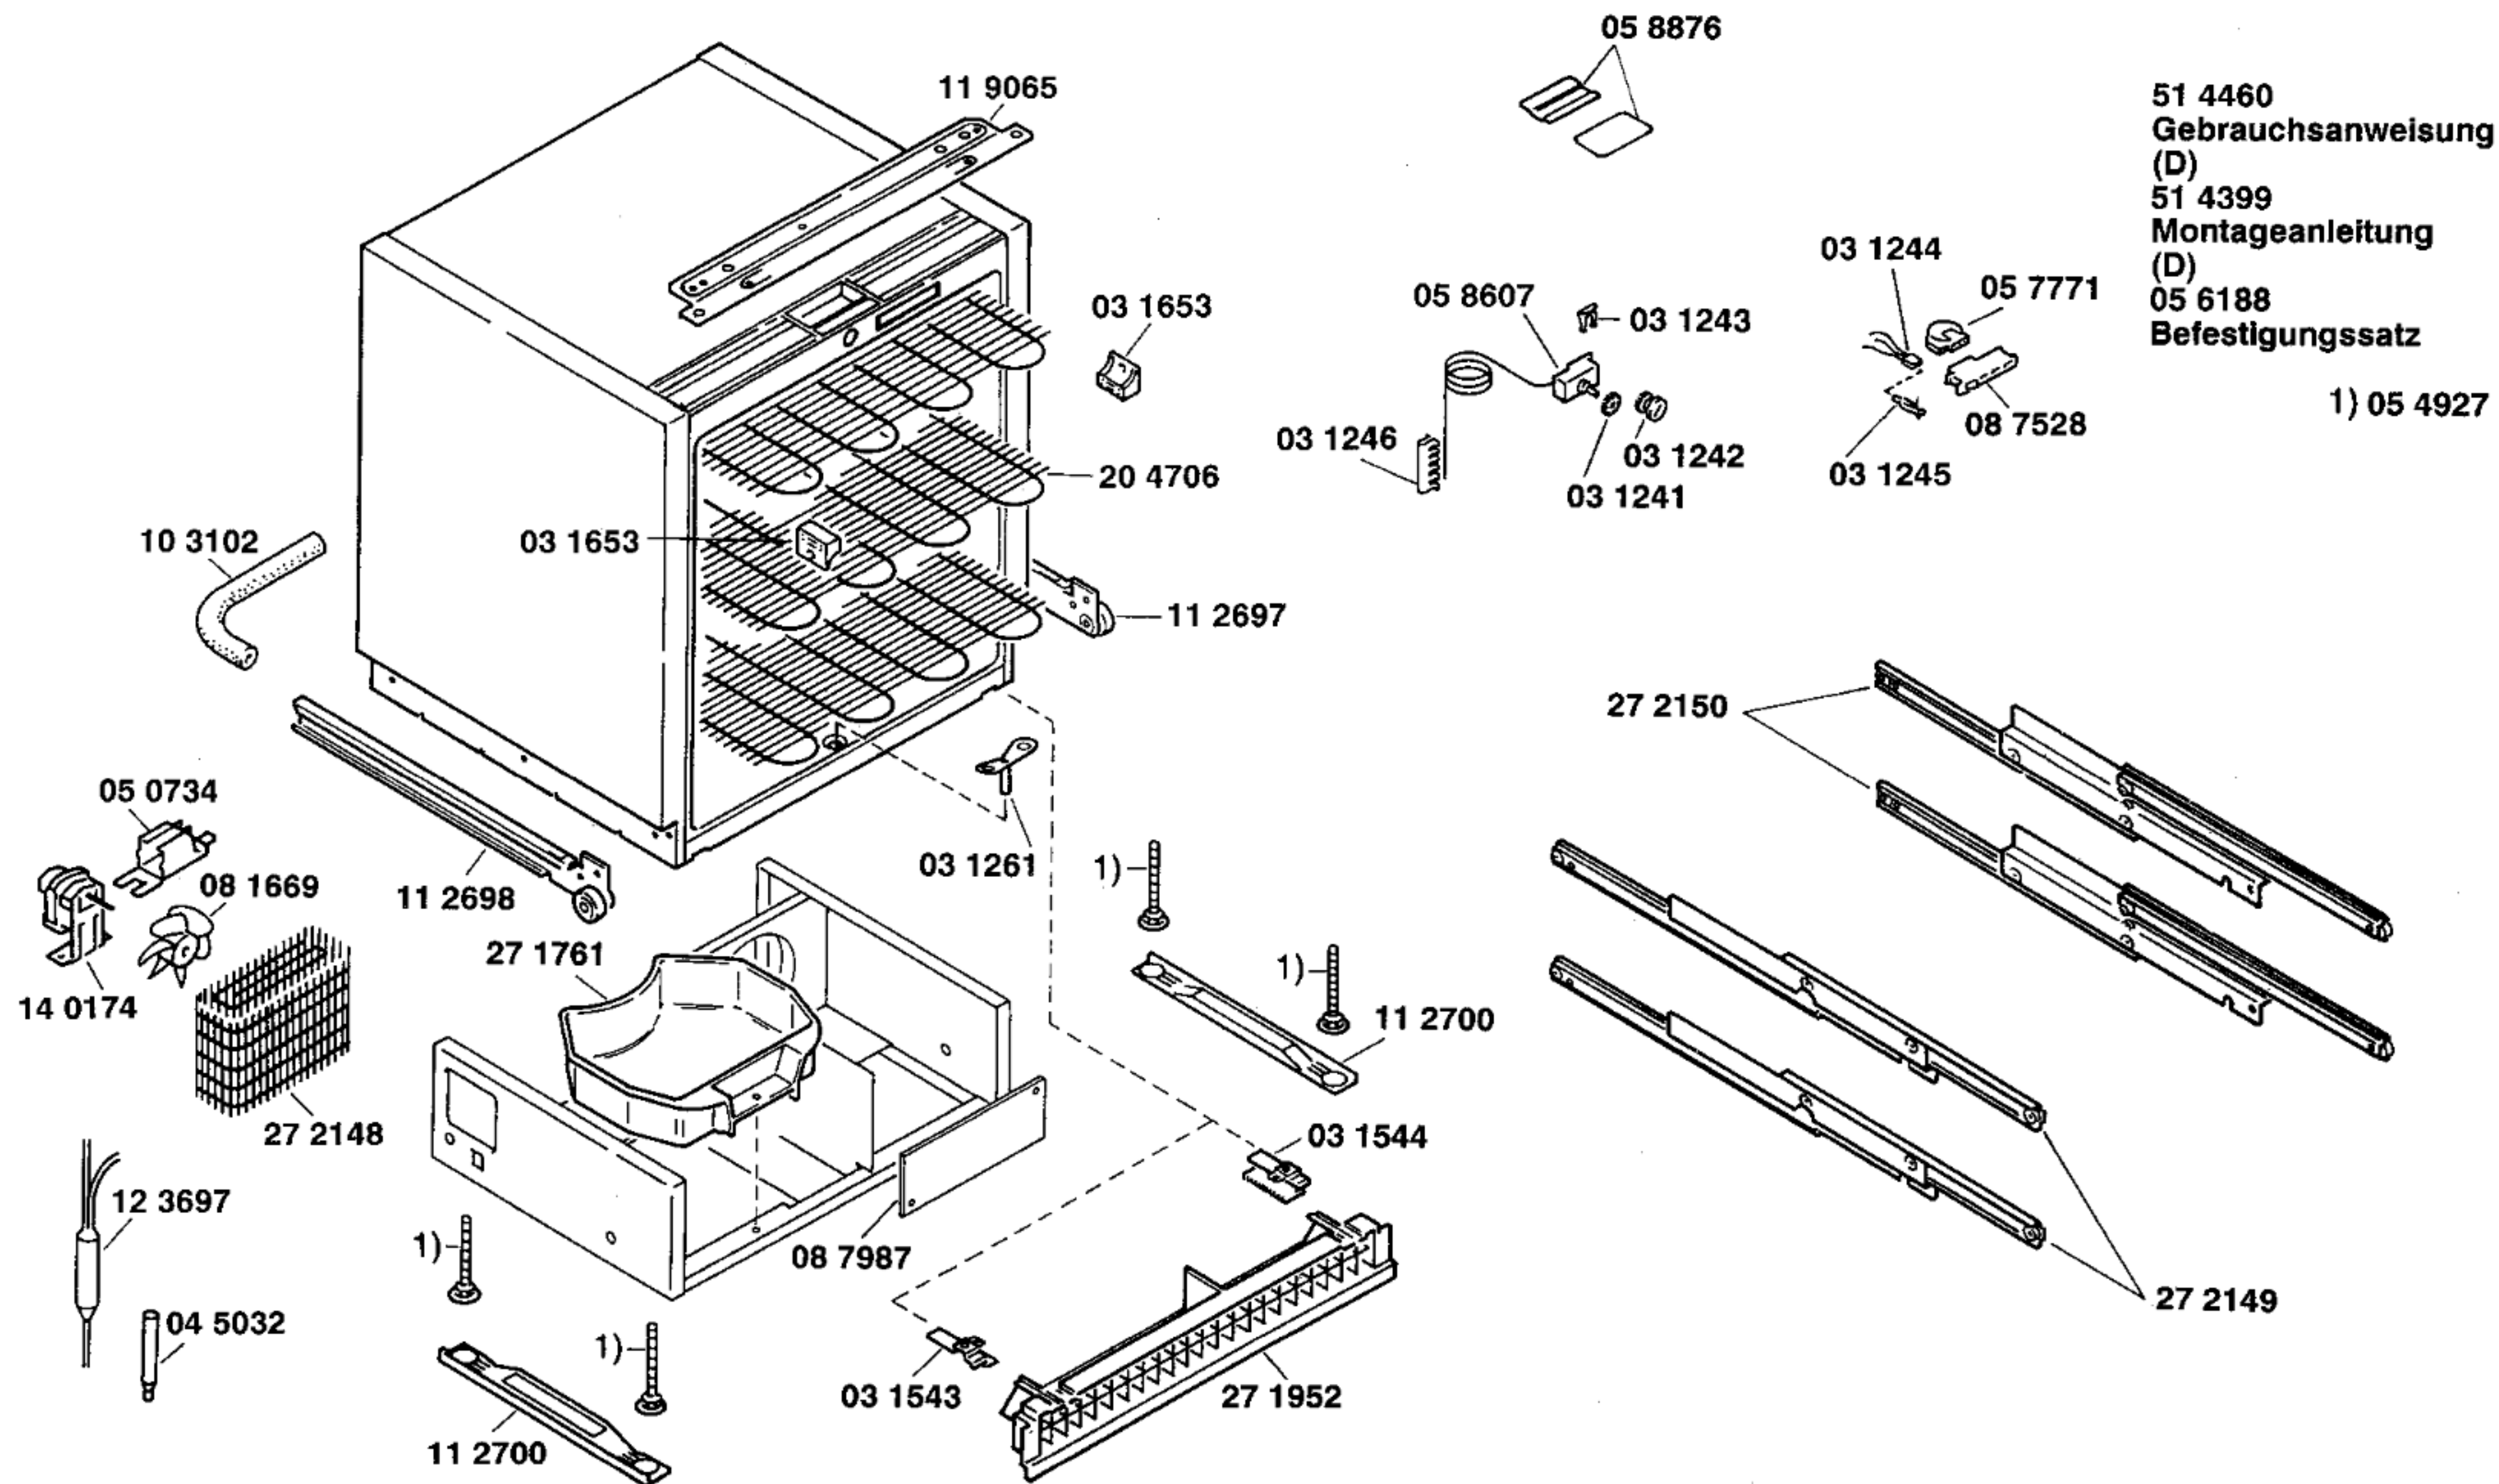

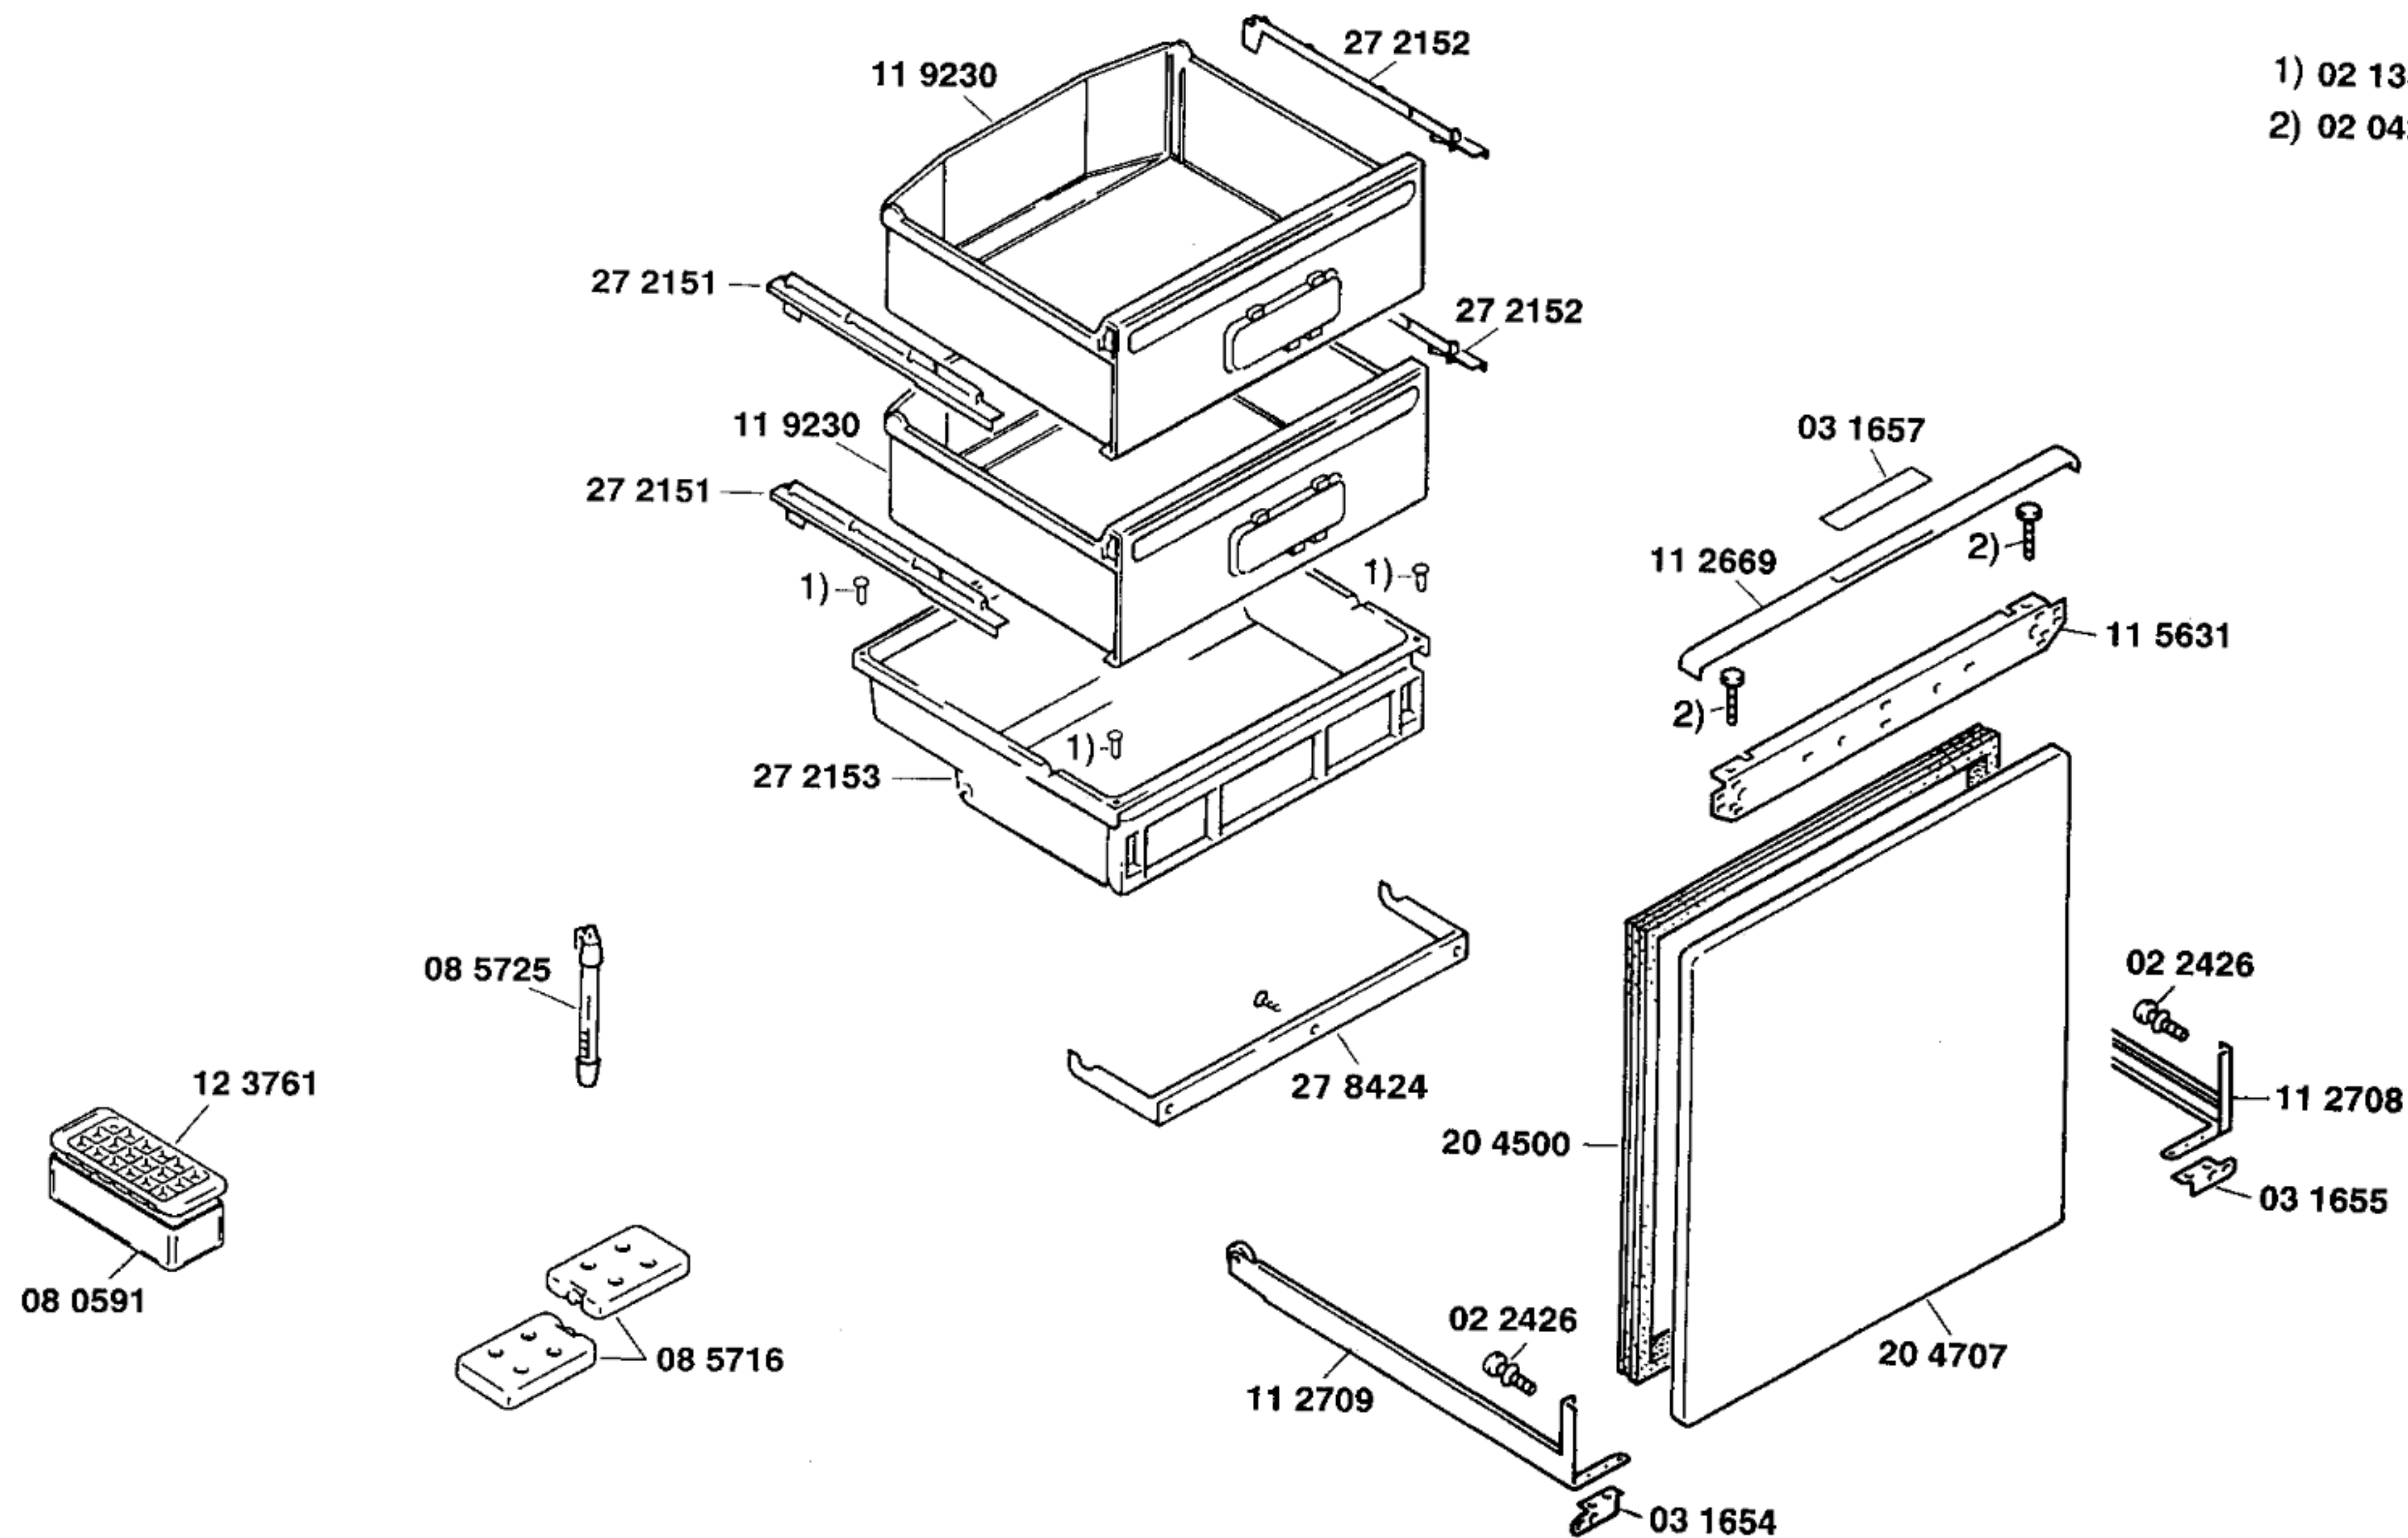

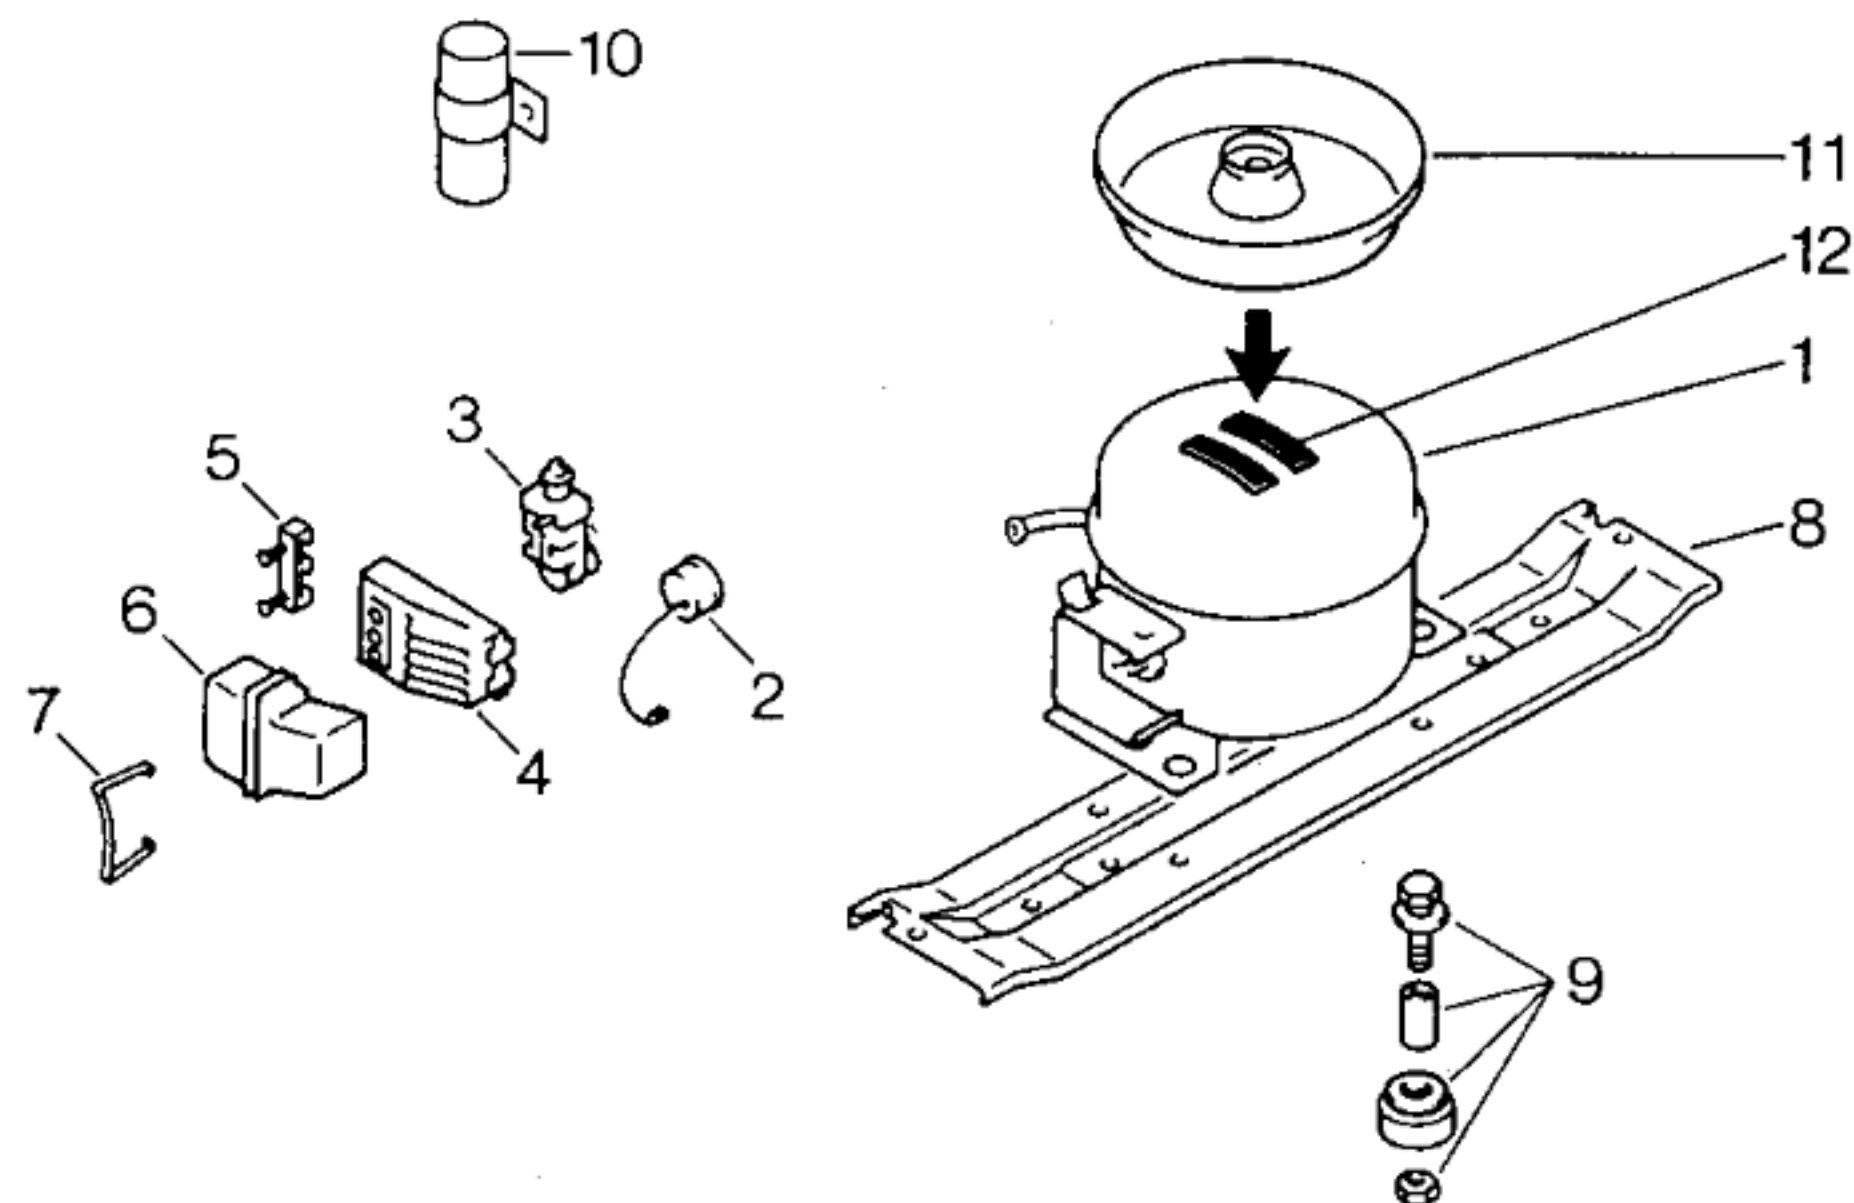

Pos.	EU1,CH1,SF1	EU2,CH2,SF2	EU3,CH3,SF3
	Aspera BP1111A	Matsushita S111LKAA	Danfoss TL5A
1	14 0516	14 0571	14 0065
2	03 1238		
3	02 7424	03 2034	02 0108
4			
5	02 7425		02 7310
6	05 5145	05 8457	05 1413
7		02 6731	
8			
9	05 0166	05 0166	05 0166
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur Typ/Type		Aspera BP 1111 A	Matsushita S111LKAA 873	Danfoss TL 5 A 914
Förderleistung/Delivery/Débit	l/h	1031		
Anlaufstrom/Starting current/Cour. de démarrage	A	8,4	6,9	9,0
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	18,3	14,3	15,5
	Hi/aux Ω	37,9	34,1	16,8
Temp.-Regler/Thermostat Typ/Type		WHF TF 57 SF 2		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/ Valeurs de commutation	„ein“ °C	-25	-17	
	„aus“	-33	-23	
	(„abtauen“ od.) „alarm“	-19,5	-13	
Füllmenge/Fill.quantity/Charge	R12 g	170		
Anschlußwert/Conn.load/Puiss. connectée	W	120		
Heizung/Heater/Chauffage Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		