



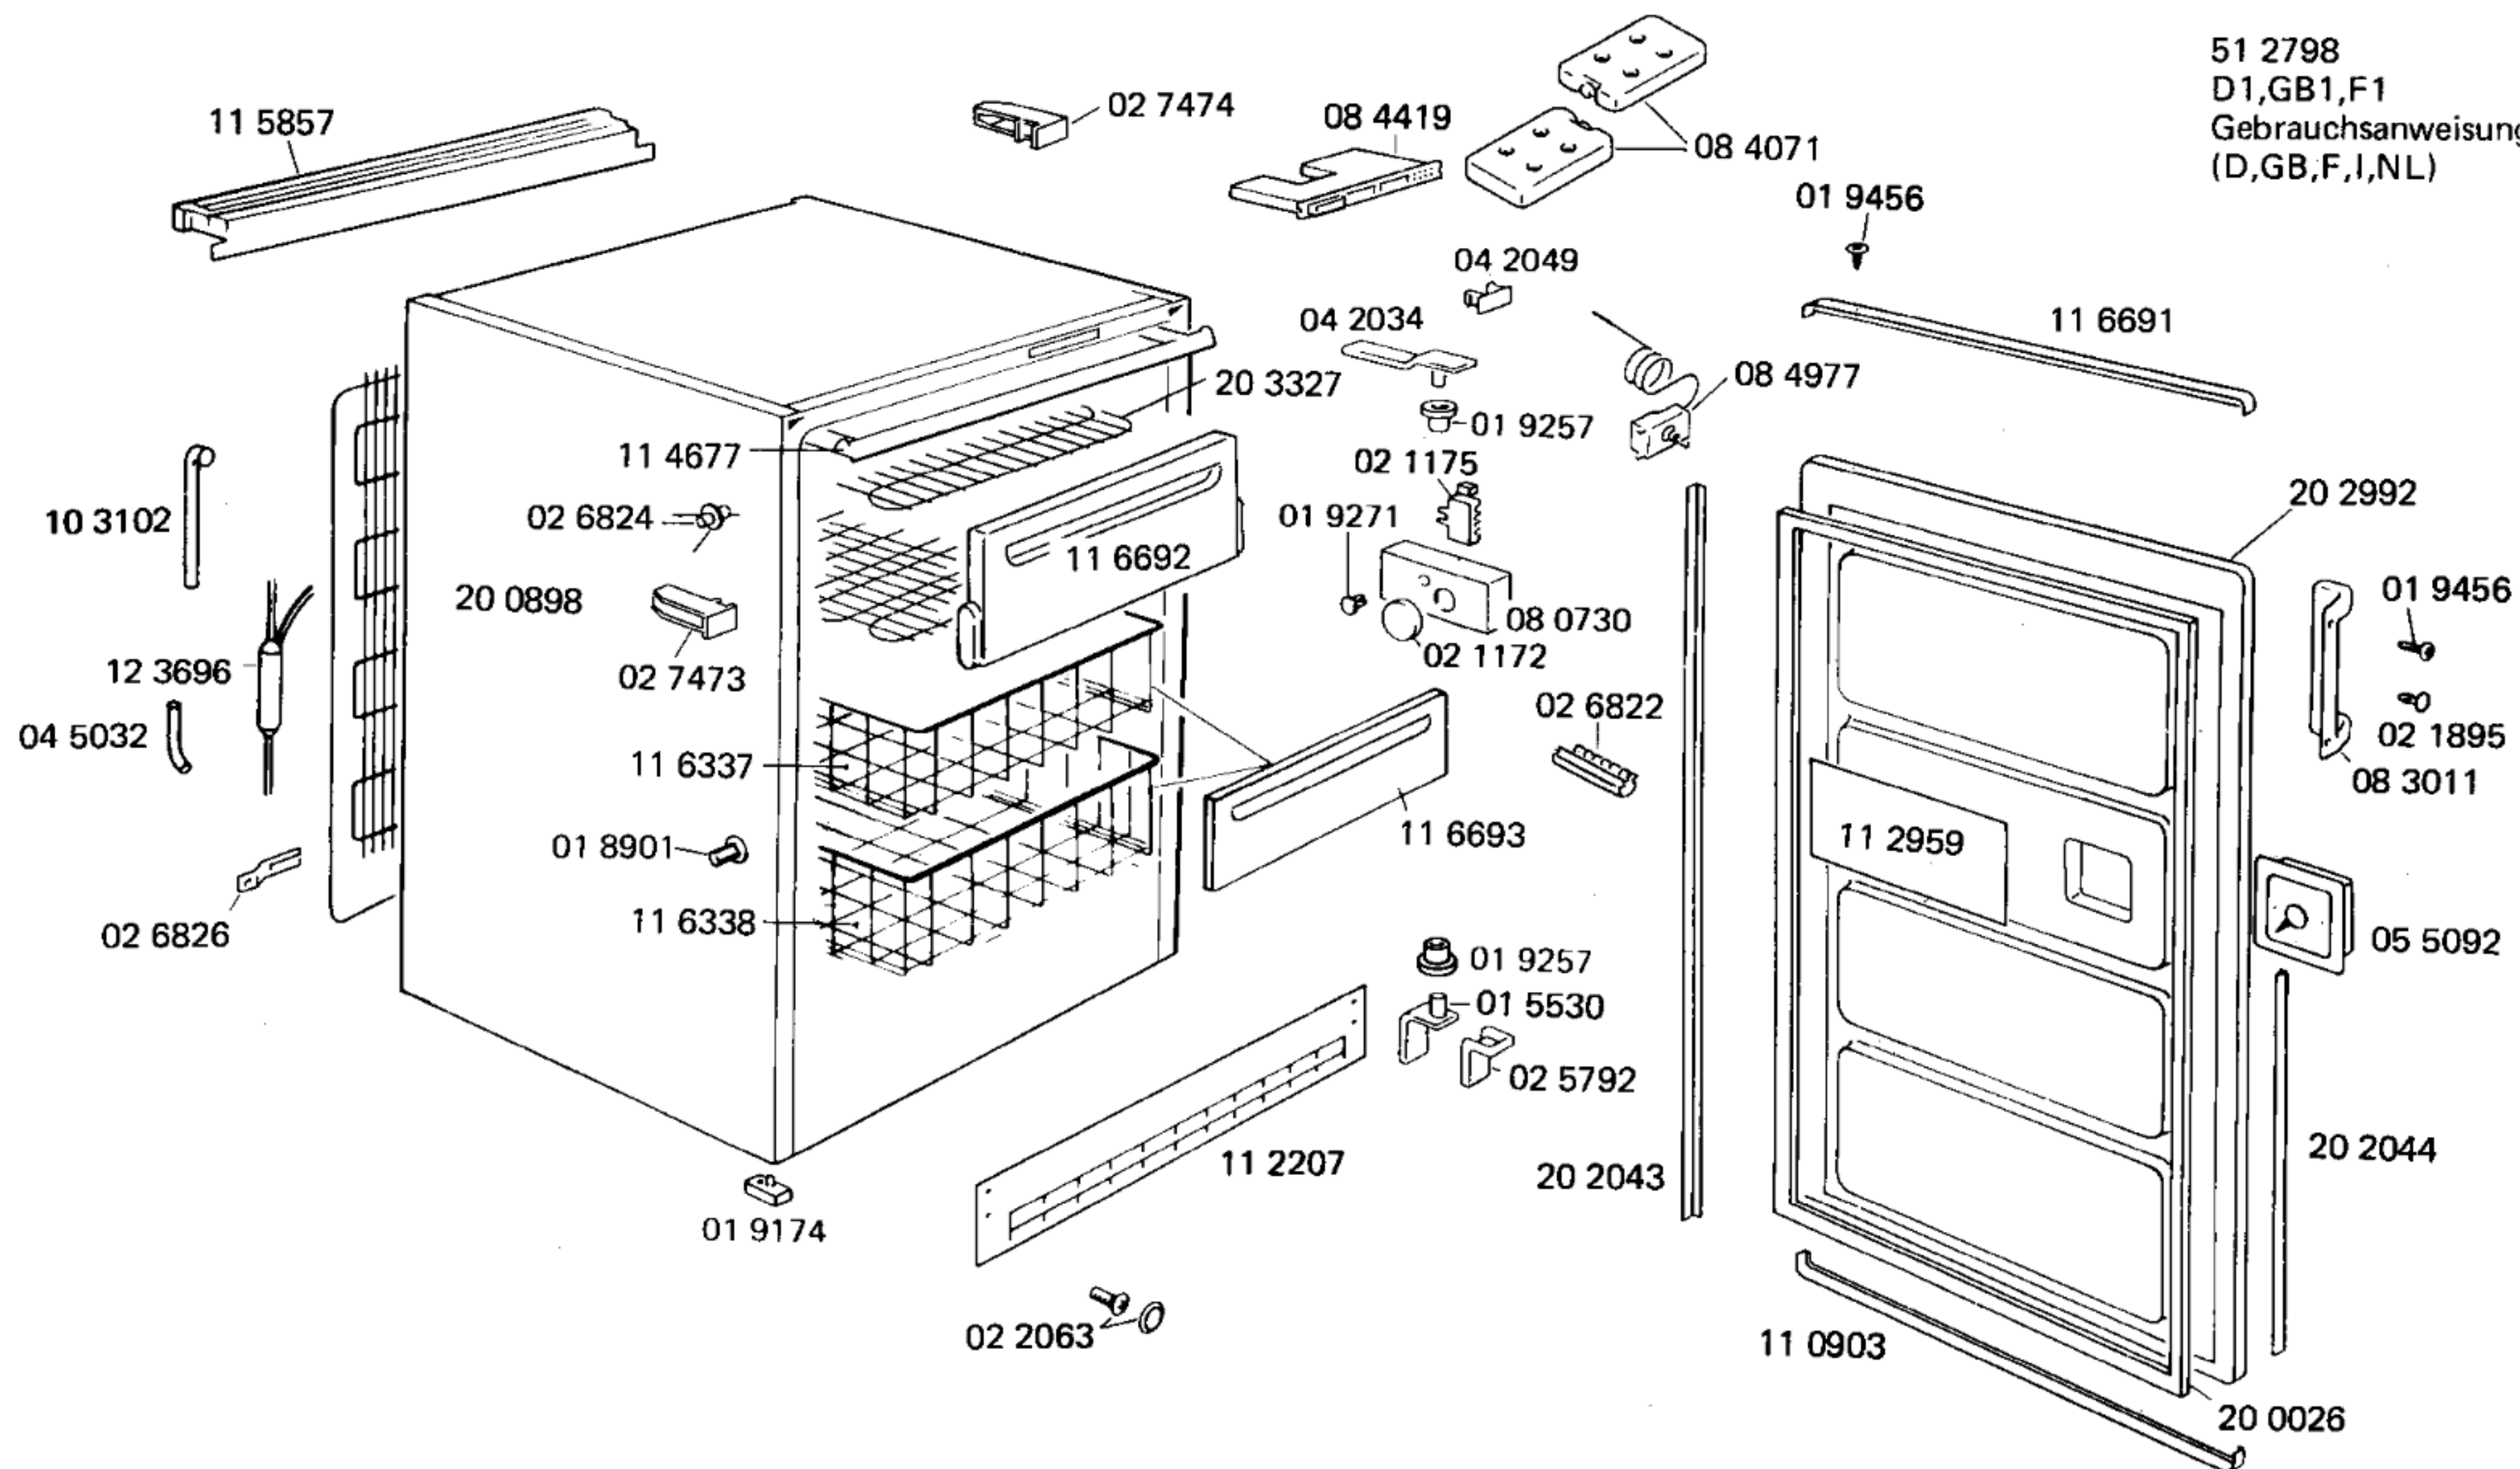

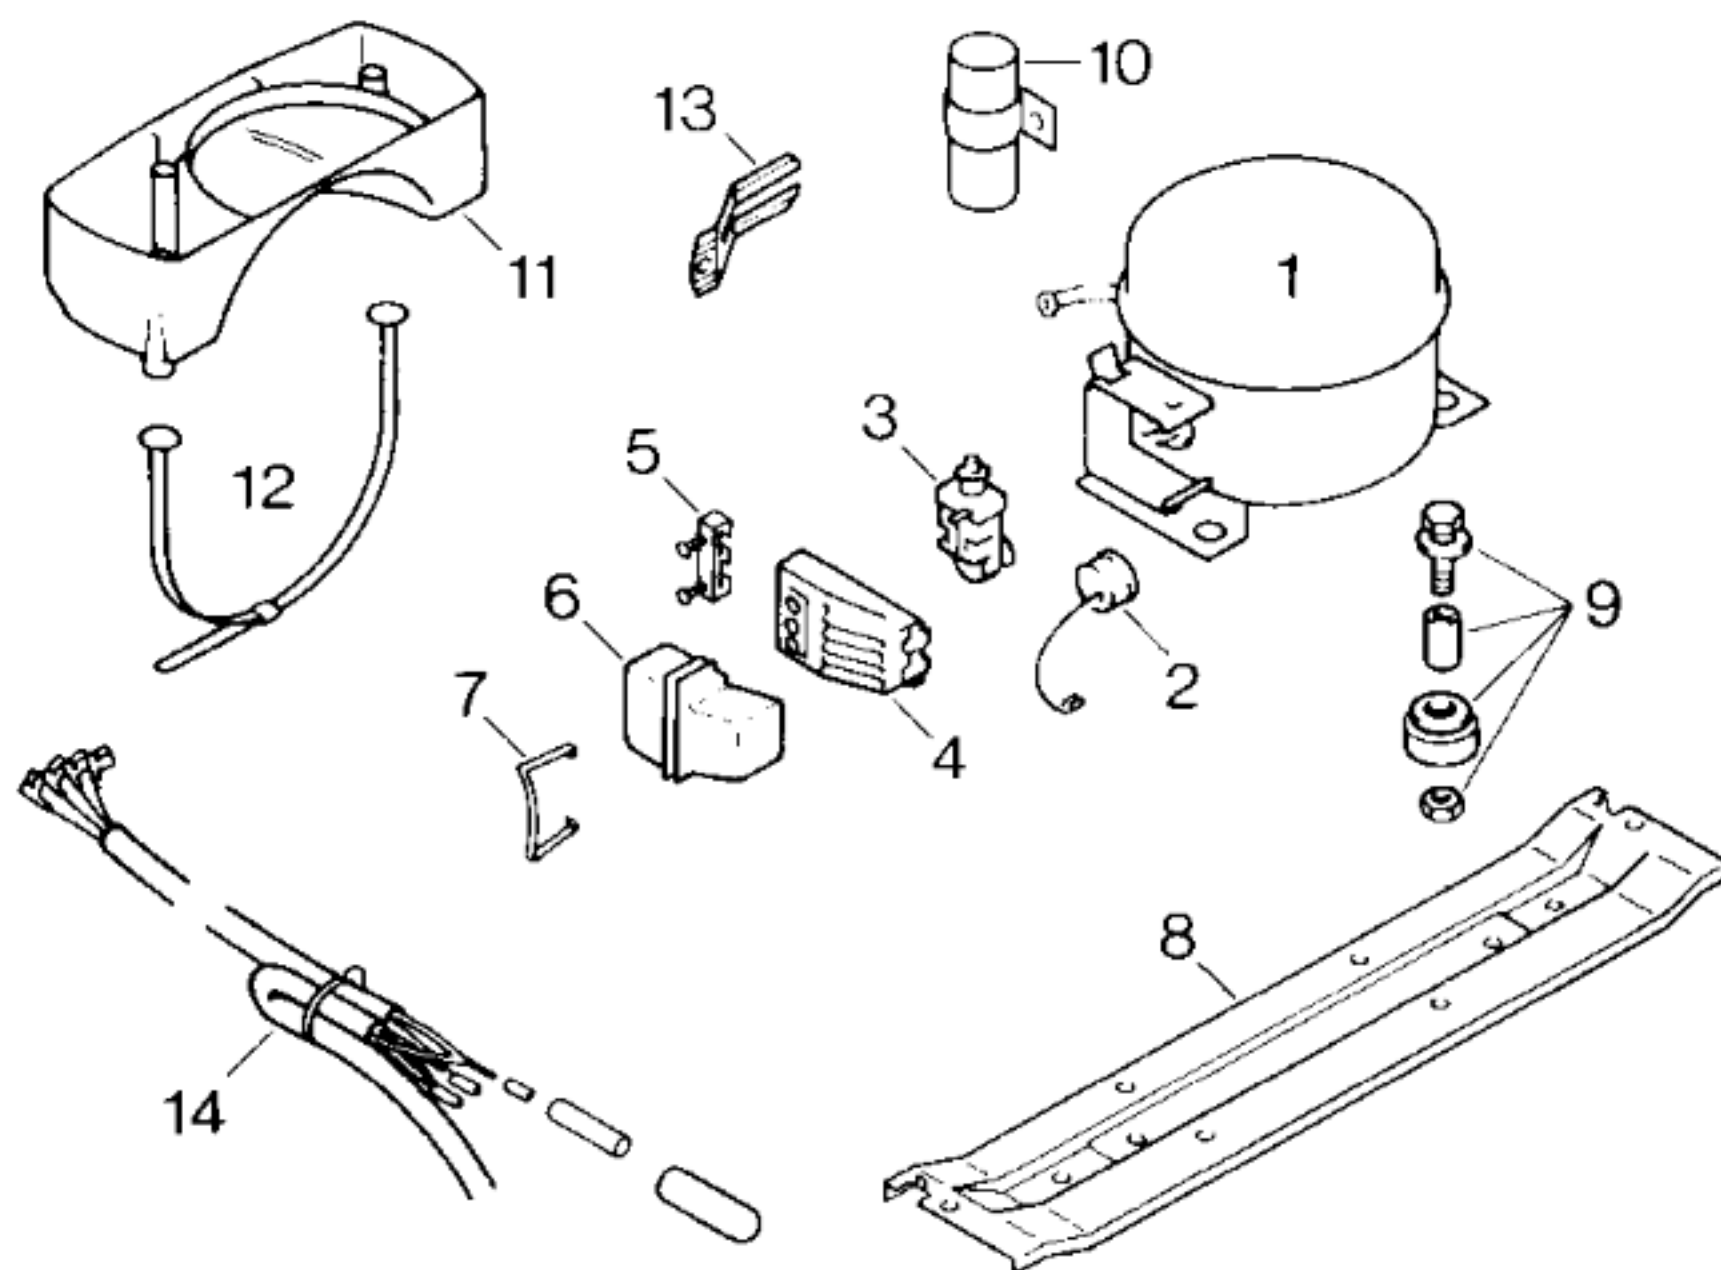

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Aspera		
Typ/Type		BY 1112 A		
Förderleistung/Delivery/Débit		l/h	1060	
Anlaufstrom/Starting current/Cour. de démarrage		A	8,5	
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	17,9
		Hi/aux	Ω	43,7
Temp.-Regler/Thermostat		M & J		
Typ/Type		TF 57 SF2		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/		„ein“	°C	- 24 - 16
Valeurs de commutation		„aus“		- 34 - 24
		(„abtauen“ od.)	„alarm“	- 19 - 12
Füllmenge/Fill.quantity/Charge		R12	g	150
Anschlußwert/Conn.load/Puiss. connectée			W	120
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance			Ω	
Leistung/Power/Puissance			W	
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance			Ω	
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance			Ω	
Spannung/Voltage/Tension			V	

Pos.	Aspera			
1	14 0166			
2	02 2337			
3	02 2342			
4	05 1748			
5				
6	05 1746			
7	02 2339			
8	11 1567			
9	05 0166			
10				
11				
12				
13				
14				