


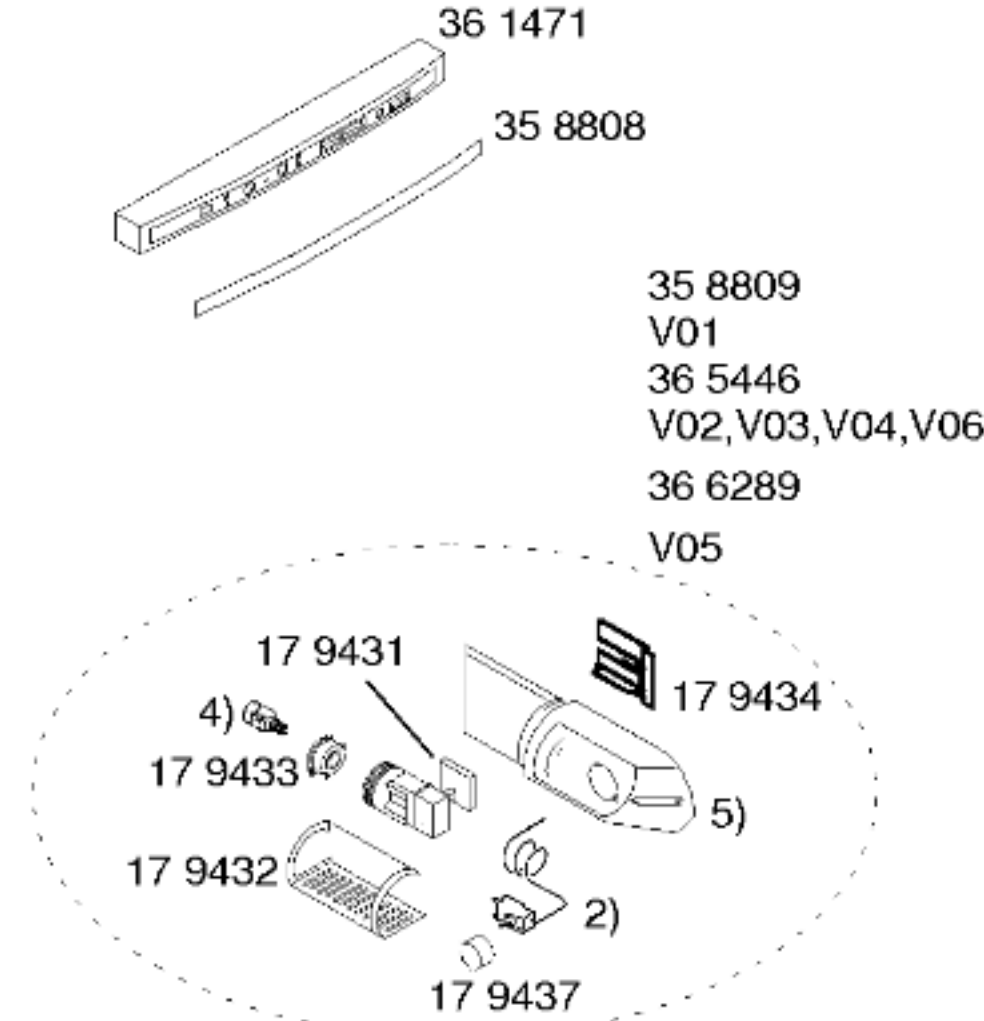
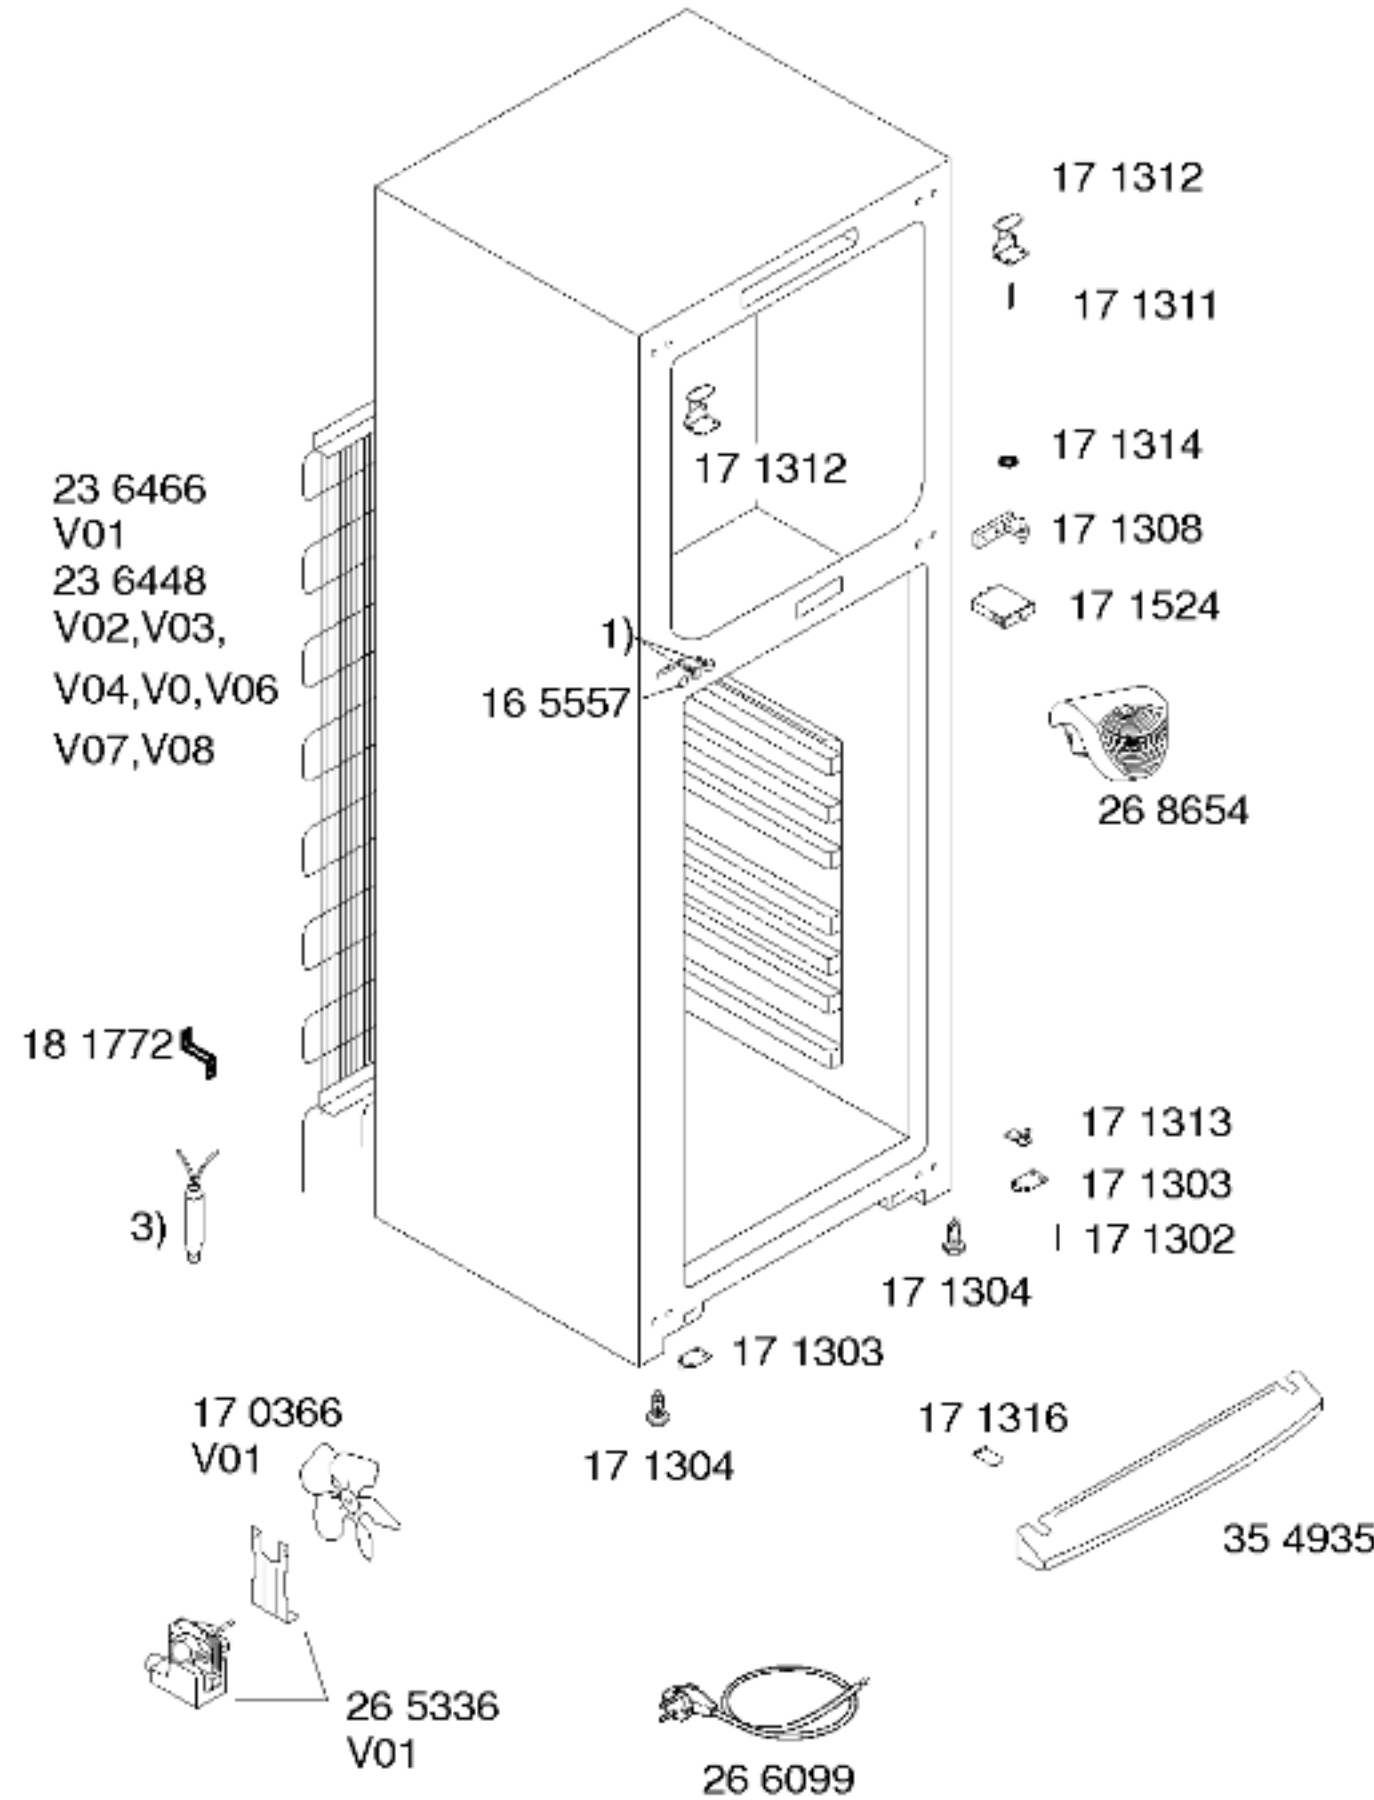
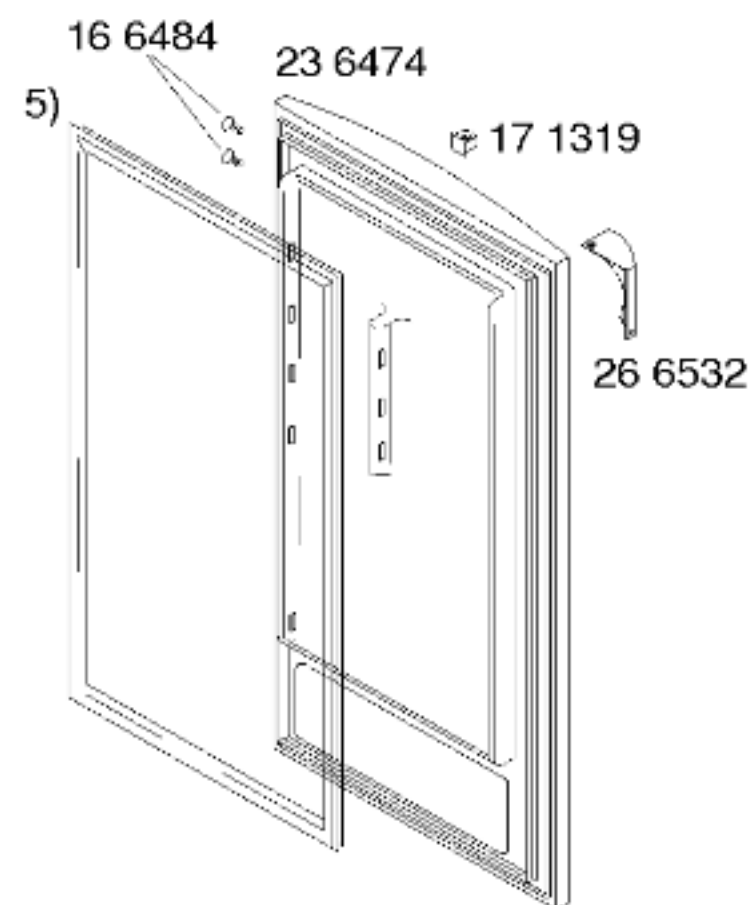


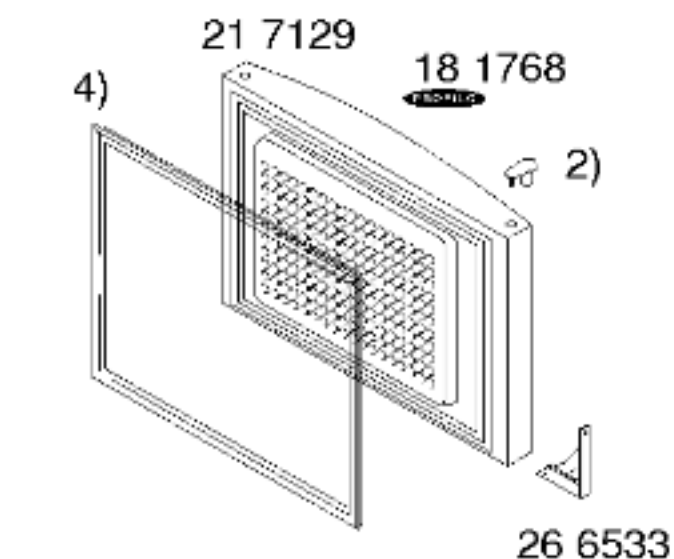

- Kullanma kilavuzu
52 8635
- V01,V02,V03,V04,V05
V06
- 58 5893
- V07,V08
(TR)
- 1) 16 5552
2) 17 9435
V01
18 7574
V02,V03,V04,V06
V07,V08
18 2415
V05
- 3) 17 1306
V01
09 3110
V02,V03,V04,V05
V06,V07,V08
- 4) 16 3390
V01,V02,V03,V04
V05,V06
41 9942
V07,V08
- 5) 26 9587
V01,V02,V03,V04
V05,V06
49 0178
V07,V08

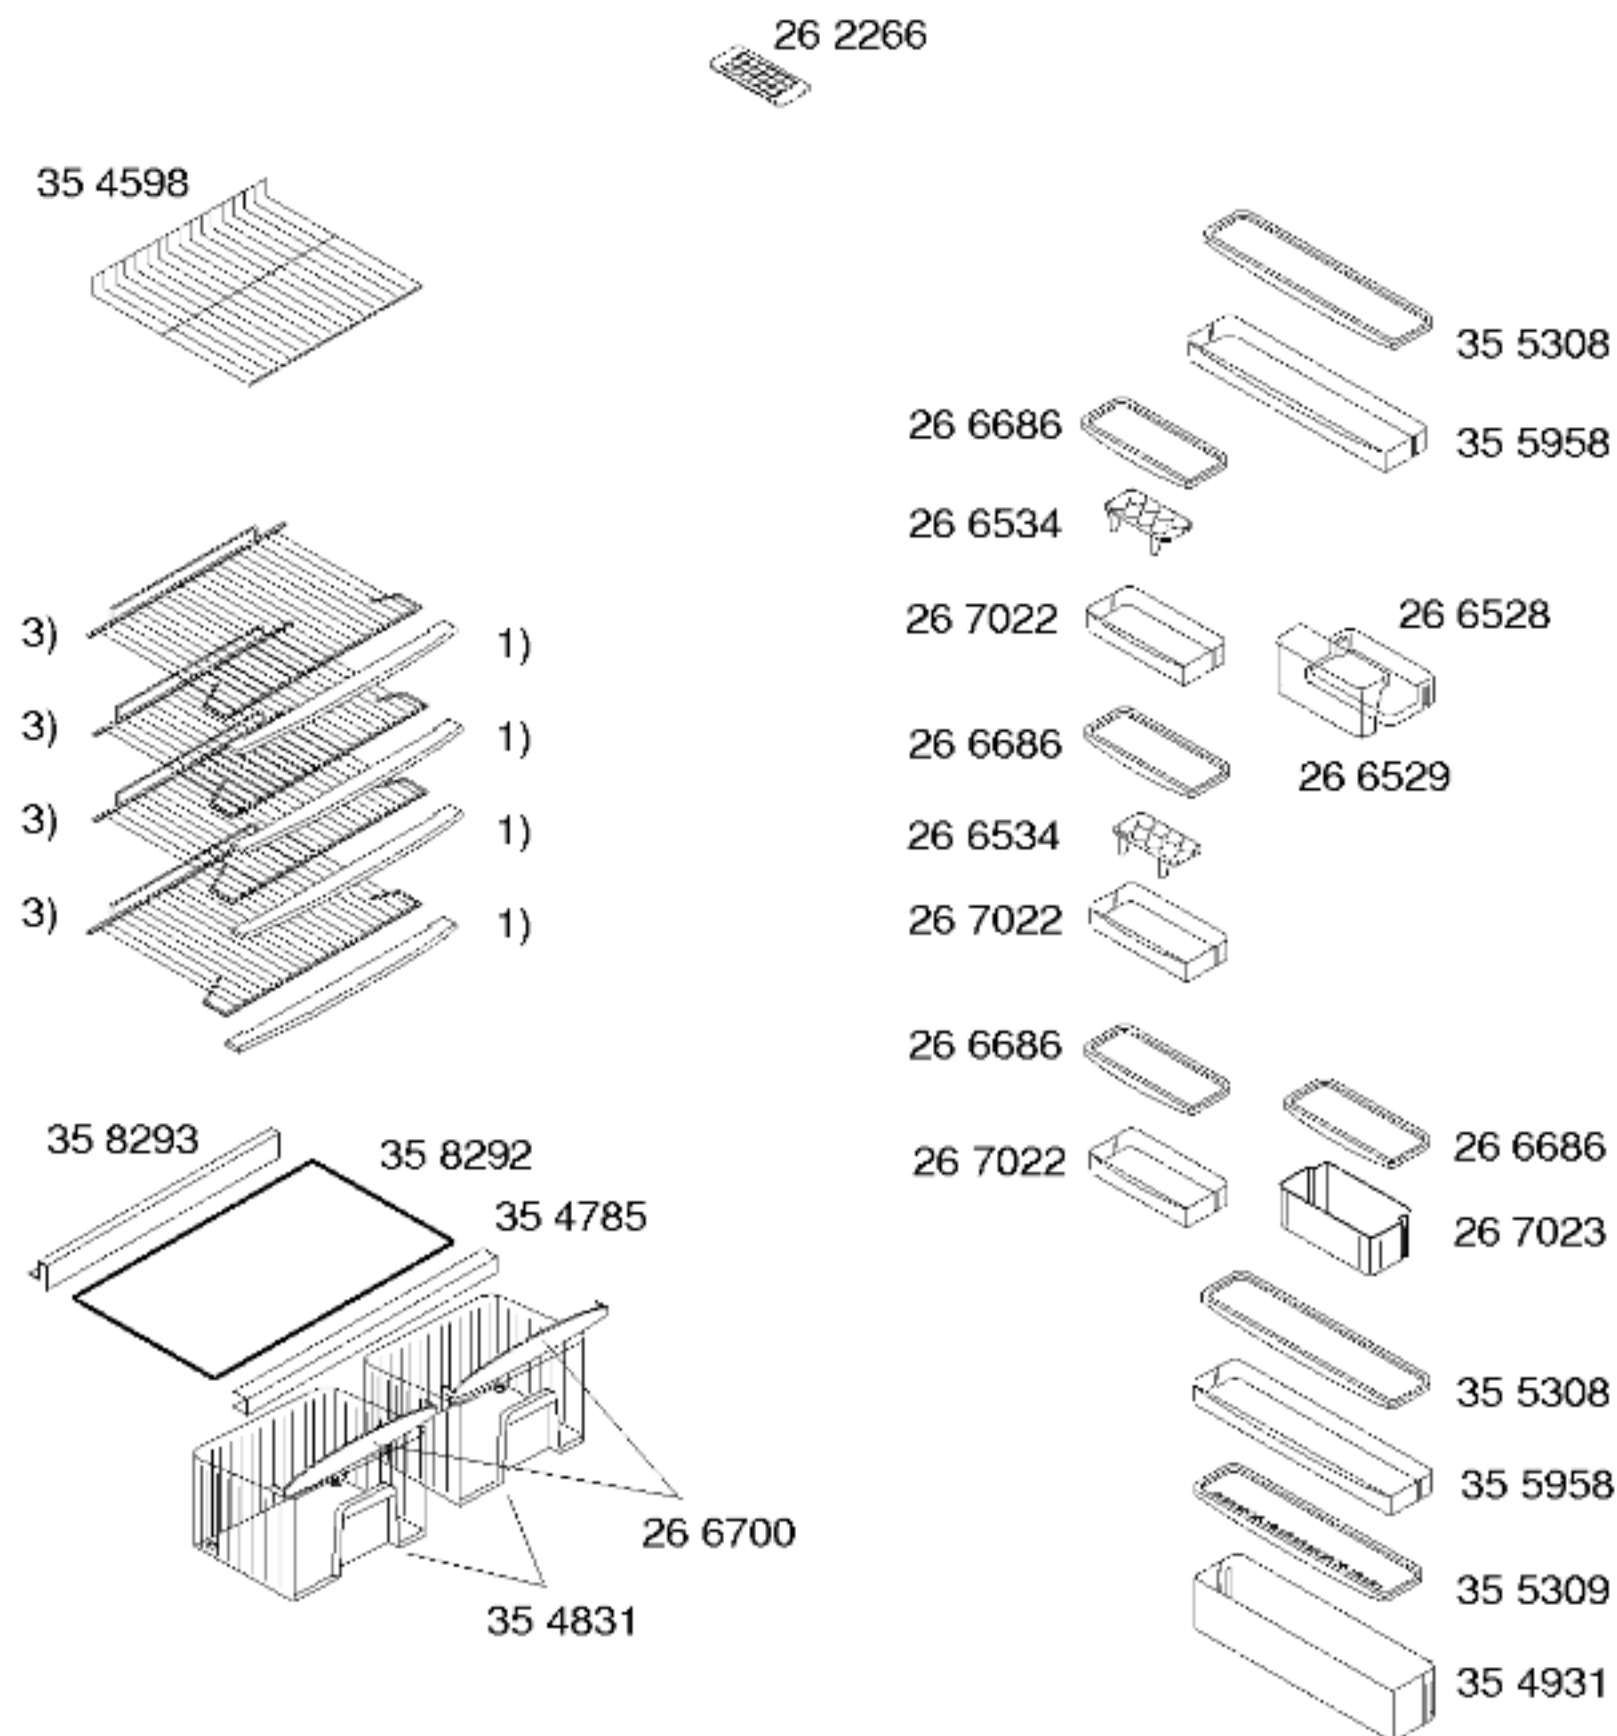

- 1) 35 4789
- 2) 17 1321
- 3) 35 4780
- 4) 21 6864
V01,V02,V03
21 8856
V04,V05,V06,V07
V08
- 5) 23 6387
V01,V02,V03
23 8419
V04,V05,V06,V07
V08

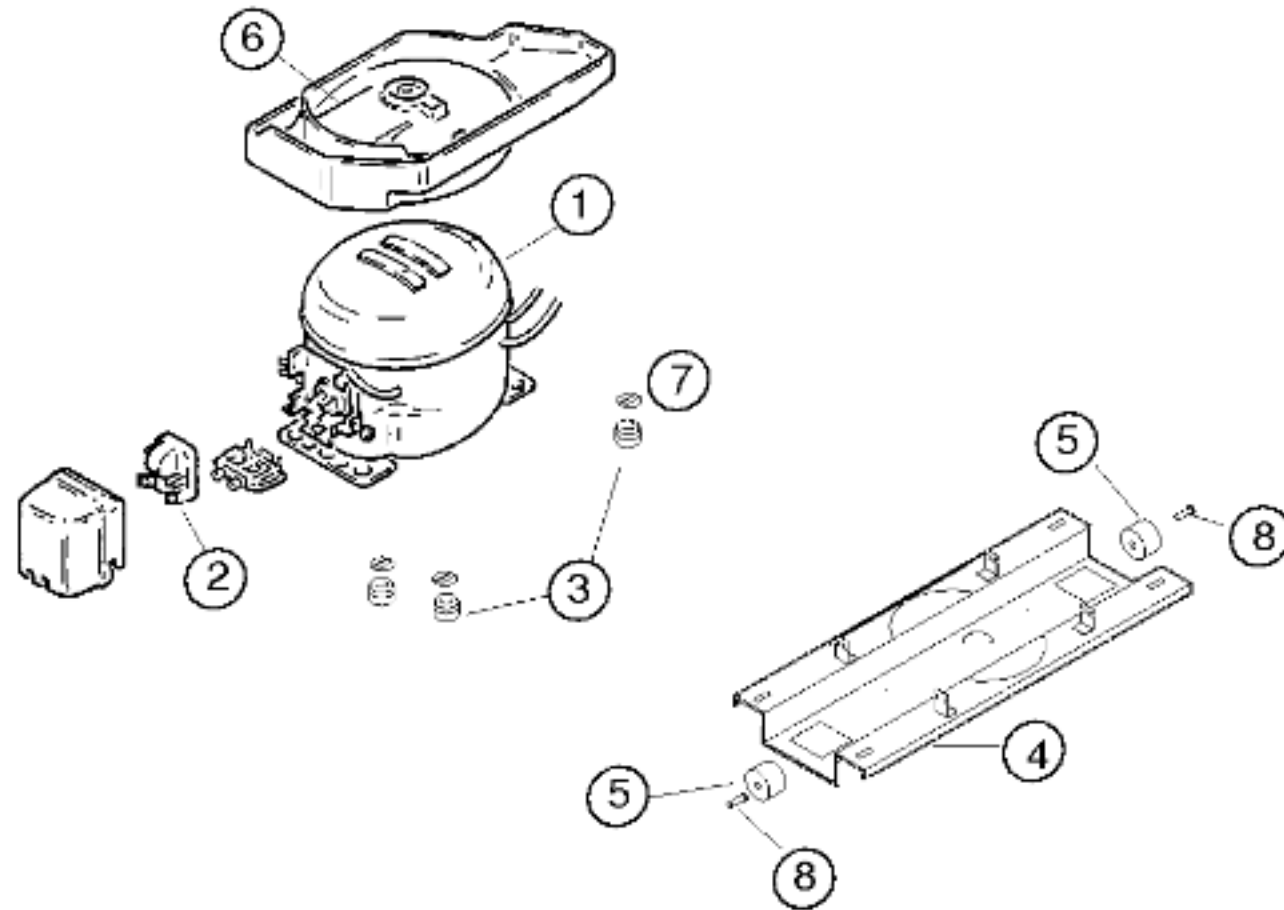

Pos.	V01	V02-V08	
	Danfoss NL11F	Danfoss NLE15 KTK2	
1	14 1916	14 2207	
2	16 5570	—	
3	16 3427		
4	35 4583		
5	17 1318		
6	26 5327		
7	17 1519		
8	18 1014		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER

	V01	V02,3,4,6,7,8	V05
Verdichter/Compressor/Kompresör Typ/Type/Tip Förderleistung/Delivery/Verim: h Anlaufstrom/Starting current/Giris akimi A Widerstand/Resistance/Rezistans Ω Hi/aux.	Danfoss NL11F 13.6 8.2 14.7	Danfoss NLE15	
Temp.Reyler/Thermostat/Termostat Typ/Type/Tip Reglerstellung/Position/Termostat pozisyonu Schaltwerte/Actua kapama degerleri ..ein/acma °C Valeurs de commutation/Termostat degeri ..aus"/kapama ..alarm' (..abtaven' od)	K59/P6834 +3.5 +3.5 -31 -20	Danfoss +4.5 +4.5 -31 -18	+4.5 +4.5 -28 -18
Füllmenge/Fill. quantily/ Dolum miktarı	R134a-V01 g R600a-V02-V08 g	*	*
Anschlusswert/Comm. load/Giris gucu W	*		
Heizung/Heater/Rezistans Widerstand/Resistance/Direnc Ω Leistung/Power/Guc W			
Ventilador/Blower/Vantilatör Widerstand/Resistance/Rezistans Ω			
Magnetventil/Magnetic valve/Manyetik valf Widerstand/Resistance/Rezistans Ω Spannung/Voltage/Gerilim V			
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakınız